

Perimeter / Underslab



Molded Polystyrene Insulation

Tru-R molded polystyrene insulation with borate is a cost-effective, durable, and energy efficient solution for below grade insulation applications. It is an ideal material to stop energy loss at the foundation or slab. Tru-R insulation with borate is a proven material with built in protection against the destructive force of termites. Tru-R insulation is available in thicknesses to meet your local R-5, R-7.5, and R-10 insulation requirements.

- R-value that never changes and is stable over time
- Range of compressive strengths available
- Closed cell insulation with superior moisture resistance
- High drying potential to rapidly release absorbed moisture
- Meets code requirements for continuous insulation

Strength/R-value.

TRU-R	Compressive Strength ¹ , psi	R-value/inch ²	
		75°F ³	40°F ⁴
150	15	4.2	4.6
250	25	4.4	4.8
400	40	4.4	4.8
600	60	4.5	4.9

¹ Compressive strength @ 10% deformation.

² R-value units are °F-ft²-h/Btu.

³ Recommended for design in WARM climates.

⁴ Recommended for design in COLD climates.

Tru-R is available in a wide range of R-values and thicknesses to meet your needs. Product thicknesses are provided in the Tru-R Thickness Selector. Project requirements vary, so Tru-R can be ordered in any R-value thicknesses to meet your needs.


Proven to meet, or exceed, building codes.

Tru-R is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40266-01. Tru-R meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



Stands up to the weather.

When tested in accordance with ASTM C1512, "Standard Test Method for Characterizing the Effect of Exposure to Environmental Cycling on Thermal Performance of Insulation Products", Tru-R maintains its R-value and strength after severe exposure to freeze-thaw cycles.

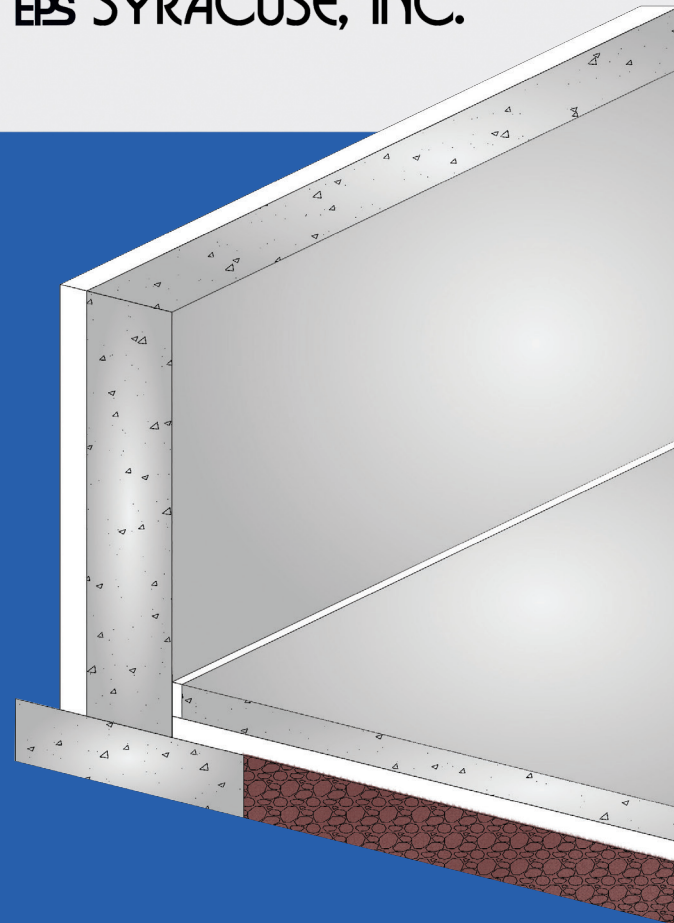

FOAM FACTS:

Tru-R outperforms XPS.

- Tru-R provides a stable long-term R-value at a lower cost
- Tru-R uses a blowing agent with 10 x lower global warming potential and 10,000 x lower ozone depletion
- Tru-R meets strength requirements at a lower cost
- Tru-R and XPS have resistance to moisture, but Tru-R has a higher vapor permeance leading to superior drying potential
- Tru-R with borate treatment available to provide termite resistance

Performance Value.

When you consider all performance characteristics and cost, Tru-R is your best choice for foam insulation.

Tru-R has air in its closed cells and therefore has a stable R-value. Many other insulations use blowing agents that cause R-value loss and are harmful to the environment.

Tru-R has compressive strength to meet specific project requirements.

Tru-R is manufactured to resist moisture absorption in wetting conditions and release absorbed moisture quickly during drying periods, which means Tru-R maintains R-value.

Termite Resistant.

One of the most destructive forces anywhere is termites. Tru-R can be manufactured with borate, a proven and safe additive, that effectively resists termites.

Tru-R with borate meets ICC ES AC239, "Acceptance Criteria for Termite-Resistant Foam Plastics".

Recyclable.

After it's life as a building insulation, Tru-R is 100% recyclable. It can be ground into granules and reincorporated into new Tru-R products or it can be thermally processed into a resin that's used to manufacture other new products.

Ready to take control? Start here.

If you're ready to have Tru-R contribute to your next project, just contact your nearest Tru-R manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Tru-R products, pricing, and answers to all of your questions.



Buffalo

(716) 874-6474

buffaloinfo@thermalfoams.com

Syracuse

(315) 699-8734

syracuseinfo@thermalfoams.com

Rochester

(585) 247-0324

buffaloinfo@thermalfoams.com

Pittsburgh

(724) 742-1200

buffaloinfo@thermalfoams.com

Albany

(518) 621-7960

syracuseinfo@thermalfoams.com

Copyright © 2020 Thermal Foams, Inc.
All rights reserved. Printed in USA.

TF05-06/20