


Nailstrip

A one-step insulation and nailable surface.

Tru-R Nailstrip consists of factory installed furring strips and UL Classified Tru-R insulation rigid insulation. It is an ideal insulation and nailable surface when applied over structurally sound walls such as poured concrete, concrete block, brick, wood, and steel framing. Stability makes Tru-R Nailstrip perfect for both interior and exterior residential and commercial wall applications.

- Saves labor with one-step installation
- Various size panels are available - 16" or 24" o.c.
- Saves energy - no thermal breaks
- Interior - eliminates labor intensive framing
- Exterior - retrofit can occur without disruption of inside living areas

Thickness/R-value.

|  Thickness | R-value ¹ | |
|--|----------------------|-------------------|
| | 75°F ² | 40°F ³ |
| 1½ | 5.8 | 6.3 |
| 2 | 7.7 | 8.3 |
| 2½ | 9.6 | 10.4 |
| 3 | 11.6 | 12.5 |
| 3½ | 13.5 | 14.6 |
| 4 | 15.4 | 16.7 |
| 4½ | 17.3 | 18.8 |

¹ R-value units are °F-ft²-h/Btu.

² Recommended for design in WARM climates.

³ Recommended for design in COLD climates.


Proven to meet, or exceed, building codes.

Tru-R is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER40266-01. Tru-R meets ASTM C578, "Standard Specification for Rigid, Cellular Polystyrene Thermal Insulation".



 THERMAL
EPS FOAMS, INC.

 THERMAL FOAMS/
EPS SYRACUSE, INC.

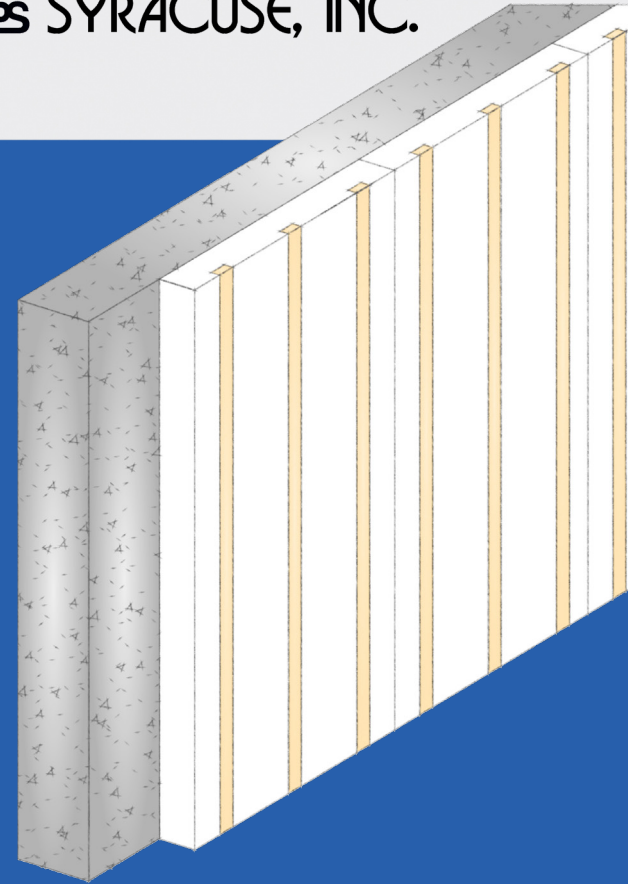

FOAM FACTS:

Tru-R Nailstrip outperforms other products.

- Factory installed furring strips at 16" or 24" o.c.
- Tru-R can easily vary strength, thickness, and size to meet project R-values
- Tru-R is less-expensive than XPS and ISO products
- No long-term R-value loss or thermal drift
- Tru-R with borate treatment available to provide termite resistance

Energy Code Ci Requirements.

The use of continuous insulation is mandated by the 2012 International Energy Conservation Code (IECC). The IECC provides a prescriptive path for wall thermal insulation that includes the use of continuous insulation.

| Walls, above grade | | | |
|--------------------|---------------------------------------|--|--|
| Zone | IECC-2012 Prescriptive Ci R-value | | |
| | Residential | Commercial | |
| | Wood-Framed Wall | Wood-Framed | |
| All other | | Group R | |
| 1 | None | R-3.8 ¹ | R-3.8 ¹ |
| 2 | None | R-3.8 ¹ | R-3.8 ¹ |
| 3 | R-5 ¹ | R-3.8 ¹ | R-3.8 ¹ |
| 4 except Marine | R-5 ¹ | R-3.8 ¹ | R-3.8 ¹ |
| 5 and 4 Marine | R-5 ¹ | R-3.8 ¹ | R-7.5 ¹ R-3.8 ² |
| 6 | R-10 ¹ R-5 ² | R-7.5 ¹ R-3.8 ² | R-7.5 ¹ R-3.8 ² |
| 7 | R-10 ¹ R-5 ² | R-7.5 ¹ R-3.8 ² | R-7.5 ¹ R-3.8 ² |
| 8 | R-10 ¹ R-5 ² | R-10 ² | R-10 ² |

¹ For use with R-13 cavity insulation
² For use with R-20 cavity insulation

Installation.

Installation shall be in strict accordance with published instructions, details, and drawings that are part of the contract documents for the project.

1. Tru-R Nailstrip must be installed over a structurally sound substrate.
2. Mechanically fasten Tru-R Nailstrip with Tru-R Fasteners or other approved fasteners long enough to penetrate the structural substrate to provide adequate holding power.

Note: Fastener types, installation, and spacing should be designed on an individual project basis. For specific fastening recommendations, please contact a sales representative or refer to the Tru-R Nailstrip Construction Manual and Technical Bulletins.

3. Provide continuous wood or metal blocking at all perimeters and openings.
4. Install weather resistive barriers and wall cladding materials per wall cladding manufacturer's specifications and recommendations for installation over continuous insulation.

Note: Climate conditions, code requirements, and building science dictate the use and position of vapor retarders within wall assemblies. Consult with local code officials and building science professional concerning the use of vapor retarders.

Ready to take control? Start here.

If you're ready to have Tru-R contribute to your next project, just contact your nearest Tru-R manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Tru-R products, pricing, and answers to all of your questions.



Buffalo
 (716) 874-6474

buffaloinfo@thermalfoams.com

Syracuse
 (315) 699-8734

syracuseinfo@thermalfoams.com

Rochester
 (585) 247-0324

buffaloinfo@thermalfoams.com

Pittsburgh
 (724) 742-1200

buffaloinfo@thermalfoams.com

Albany
 (518) 621-7960

syracuseinfo@thermalfoams.com

Copyright © 2020 Thermal Foams, Inc.
 All rights reserved. Printed in USA.
 TFNS01-06/20